
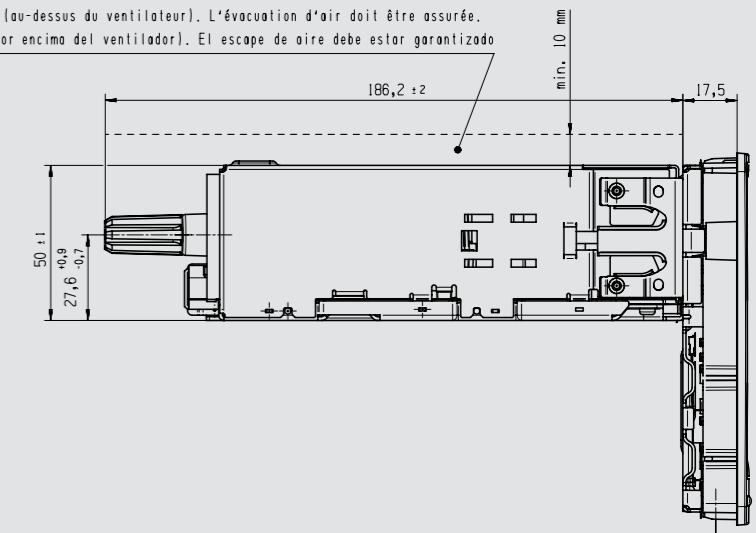


TECHNICAL DATA


Power supply	13.5 V (via CM-A 19)
Current consumption In operation	Approx. 1.6 A, active navigation and audio 2 x 2 W
Max. Standby current	< 10 A < 0.1 mA
Frequency ranges NAFTA FM AM WB	87.9 – 107.9 MHz 530 – 1710 kHz 162.400 – 163.275 MHz
Bluetooth	A2DP, AVRCP, HFP, MAP, PBAP, SPP hands-free phone calls, phone book, music playback
Inputs MIC	1 mV for dyn. microphones private mode
2 x USB	USB 2.0, HSD connectors WMA, MP3, AAC, MFi-IAP2, MTP
analogue camera	Rear view camera, camera sources via CM-P 19
Output power	2 x 20 W
Display	7" capacitive touch display, 800 x 480 pixels
Operating temperature	-20 °C to +70 °C
Storage temperature	-40 °C to +85 °C
Dimensions (W x H x D)	188 x 120 x 204 mm
Weight	Approx. 1500 g Approx. 1750 g incl. mounting frame 7 620 270 013
Certification	CE, UKCA, UN ECE R10, UN ECE R118, RSS-247
Tested acc. to	FCC, MVSS302

Ausreichende Luftzirkulation (oberhalb des Lüfters) sicherstellen.
space for airflow (above the fan) air exhaust must be ensured.

Veiller à ce que l'espace soit suffisant la circulation de l'air (au-dessus du ventilateur). L'évacuation d'air doit être assurée.
Asegúrese de que haya suficiente espacio para el flujo de aire (por encima del ventilador). El escape de aire debe estar garantizado.

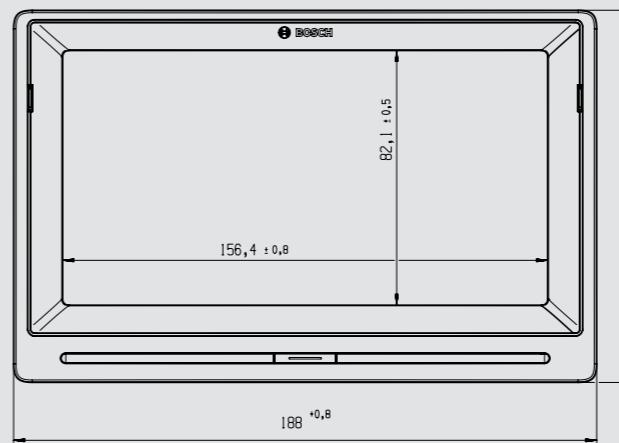

Einbauposition: Einbauwinkel ±15° zulässig
Mounting position: swiveling ±15° allowed
Position de montage: angle de montage de ±15° admissible
Posición de montaje: ángulo de montaje de ±15° permitido

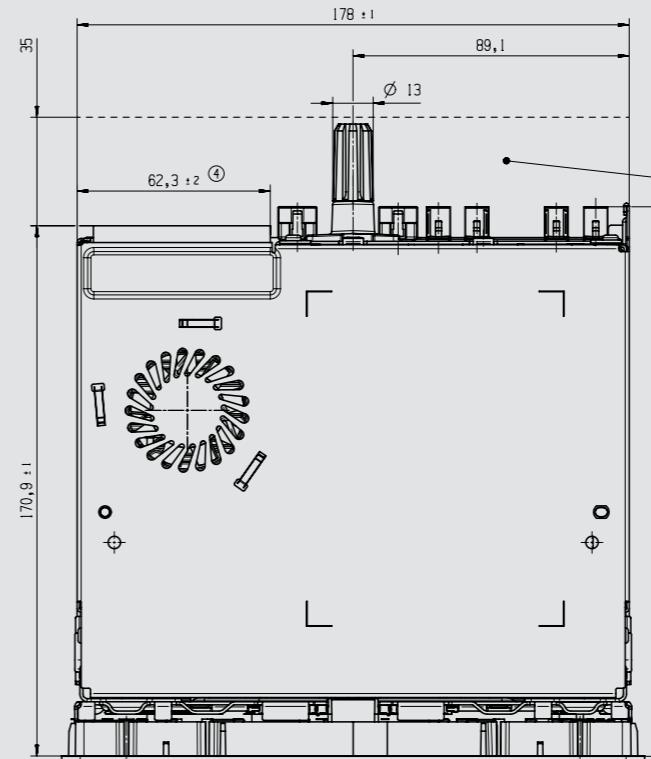

Ausreichenden Stecker-
freiruum sicherstellen.
Provide sufficient
space for connectors.
Veiller à pourvoir suffi-
samment d'espace pour
les prises.
Asegúrese de que haya
suficiente espacio para
los conectores.