

Product information

Center CM-C 19

7 620 350 076

EN The Center CM-C 19 provides the central controls of the Bosch Coach Infotainment series. It is equipped with a 7" touch display, an FM/AM/DAB (EU only)/SiriusXM (NAFTA only) radio tuner and a navigation system.

Robert Bosch Car Multimedia GmbH hereby declares that the radio equipment type Center CM-C 19 is in compliance with Directive 2014/53/EU. The complete text of the EU Declaration of Conformity is available at the internet address below.

Hereby, Robert Bosch GmbH declares that the product Center CM-C 19 is in compliance with the relevant statutory requirements. The full text of the Declaration of Conformity is available at the internet address below.

The safety notices applicable to the device can be found in the device's operating instructions. You can download the device's operating instructions and Declaration of Conformity at www.bosch-professional-systems.com.

ES El Center CM-C 19 proporciona los elementos de mando centrales de la gama de productos Coach Infotainment Series de Bosch. Está equipado con una pantalla táctil de 7", un sintonizador de radio FM/AM/DAB (solo UE)/SiriusXM (solo TLCAÑ) y un sistema de navegación.

Por la presente, Robert Bosch GmbH declara que el equipo de radio Center CM-C 19 es conforme con la Directiva 2014/53/EU. El texto completo de la Declaración de conformidad de la UE está disponible en la dirección de internet que se indica más abajo.

Las advertencias de seguridad relativas al equipo se pueden consultar en el manual de instrucciones. Tanto el manual como la Declaración de Conformidad pueden descargarse de la página web www.bosch-professional-systems.com.



Robert Bosch GmbH
 Robert-Bosch-Platz 1
 70839 Gerlingen
 Germany
www.bosch-professional-systems.com




Technical data subject to modification without notice.
 Printed in Germany. Any color variations are due to the limitations of the printing process.
 Printed on 100% chlorine-free bleached cellulose manufactured in an environmentally friendly process.

TECHNICAL DATA	
Power supply	13.5 V (via CM-A 19)
Current consumption In operation	Approx. 1.6 A, active navigation and audio 2 x 2 W
Max. Standby current	< 10 A < 0.1 mA
Frequency ranges NAFTA FM AM WB	87.9 – 107.9 MHz 530 – 1710 kHz 162.400 – 163.275 MHz
Bluetooth	A2DP, AVRCP, HFP, MAP, PBAP, SPP hands-free phone calls, phone book, music playback
Inputs MIC 2 x USB analogue camera	1 mV for dyn. microphones private mode USB 2.0, HSD connectors WMA, MP3, AAC, MFi-IAP2, MTP Rear view camera, camera sources via CM-P 19
Output power	2 x 20 W
Display	7" capacitive touch display, 800 x 480 pixels
Operating temperature	-20 °C to +70 °C
Storage temperature	-40 °C to +85 °C
Dimensions (W x H x D)	188 x 120 x 204 mm
Weight	Approx. 1500 g Approx. 1750 g incl. mounting frame 7 620 270 013
Certification	CE, FCC, UKCA, UN ECE R10, UN ECE R118

Ausreichende Luftzirkulation (oberhalb des Lüfters) sicherstellen.
space for airflow (above the fan) air exhaust must be ensured.
Veiller à ce que l'espace soit suffisant la circulation de l'air (au-dessus du ventilateur). L'évacuation d'air doit être assurée.
Asegúrese de que haya suficiente espacio para el flujo de aire (por encima del ventilador). El escape de aire debe estar garantizado

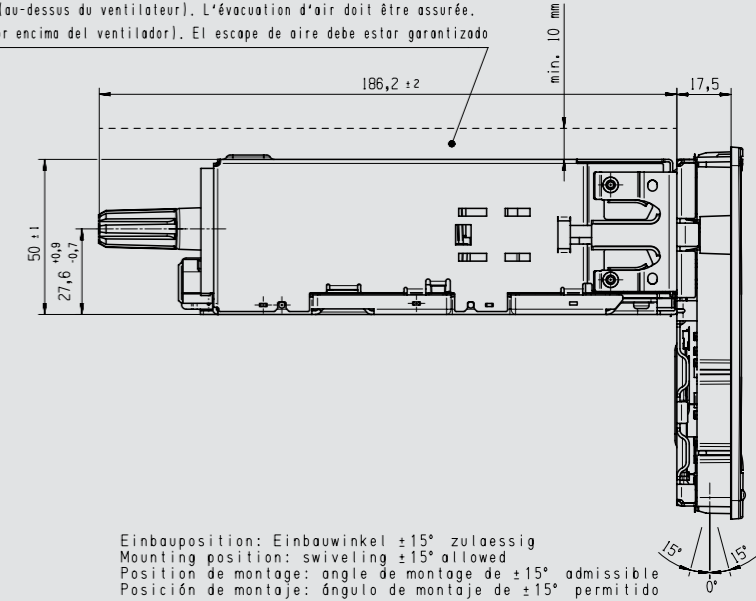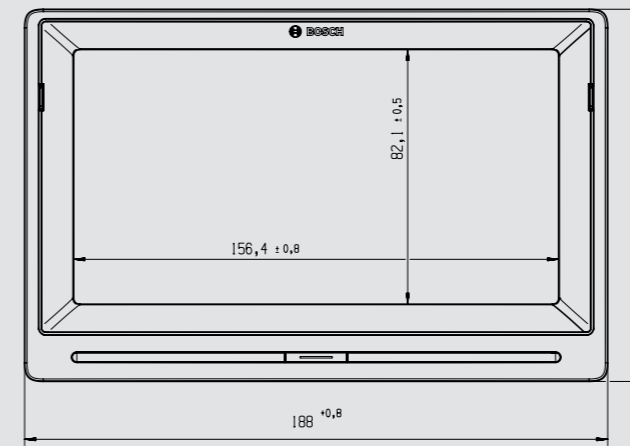

Einbauposition: Einbauwinkel ±15° zulässig
Mounting position: swiveling ±15° allowed
Position de montage: angle de montage de ±15° admissible
Posición de montaje: ángulo de montaje de ±15° permitido

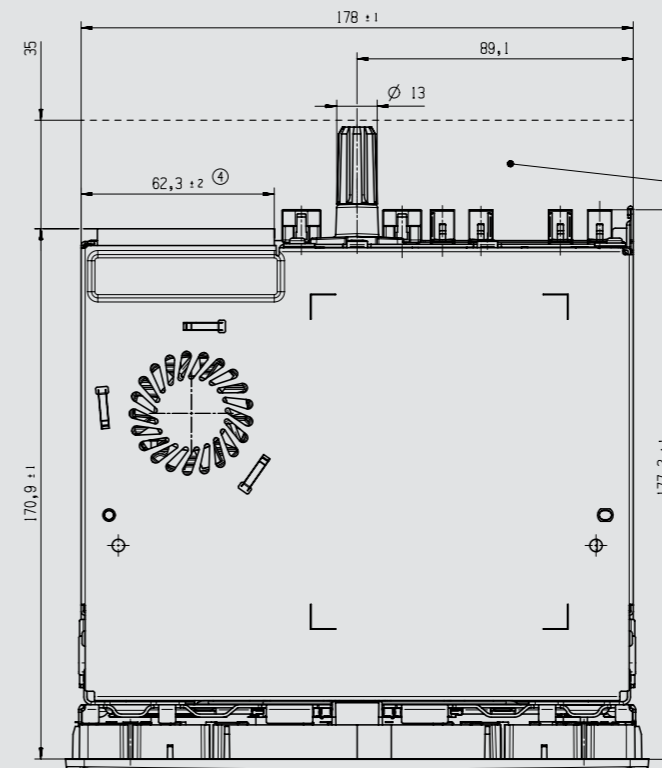

Ausreichenden Stecker-
freiraum sicherstellen.
Provide sufficient
space for connectors.
Veiller à pourvoir suffi-
samment d'espace pour
les prises.
Asegúrese de que haya
suficiente espacio para
los conectores.