





BS CCD je uređaj za prikaz sistema Professional Line 3 s integriranim radiom i CD pogonskim uređajem kompatibilnim za MP3 formate. CCD BT opciono nudi mogućost Bluetooth® telefonije. Ovim Robert Bosch Car Multimedia GmbH izjavljuje da je radio oprema tipa CCD/CCD Prof BT u skladu sa navodima Direktive 1999/5/EZ i/ili 2014/53/EU. Cijeli tekst EU izjave o usklađenosti dostupan je na internetskoj adresi navedenoj u nastavku.

Bezbjednosne napomene koje se odnose na uređaj možete naći u uputstvu za upotrebu uređaja. Uputstvo za upotrebu i izjavu o usklađenosti uređaja možete preuzeti na internetu na www.bosch-professional-systems.com.

SR CCD je uređaj za prikazivanje sistema Professional Line 3, u koji su integrirani radio i CD jedinica kompatibilna za MP3 formate. CCD BT izborno nudi mogućnost Bluetooth® telefonije. Robert Bosch Car Multimedia GmbH ovim izjavljuje da je radio oprema tipa CCD/CCD Prof BT u skladu s navodima Direktive 1999/5/EZ i/ili 2014/53/EU. Ceo tekst EU izjave o usaglašenosti dostupan je na dole navedenoj internet adresi.

Bezbednosne napomene u vezi s uređajem možete naći u uputstvu za upotrebu uređaja. Uputstvo za upotrebu i izjavu o usaglašenosti uređaja možete preuzeti na internetu na www.bosch-professional-systems.com.

| TECHNICAL DATA | | | |
|--|----|--|--|
| Power supply | | 12 V via CPA | |
| Current consumption of CPA 811 incl. devices (CCS CCD/CCD BT) | | | |
| In operation | | Approx. 1.3 A, FM 1 kHz | |
| Max. current | | Approx. 10 A | |
| Standby current | | Approx. 0.5 mA | |
| Current consumption of CPA 2011 incl. devices (CCS CCD/CCD BT) | | | |
| In operation | | Approx. 1.3 A, FM 1 kHz | |
| Max. current | | Approx. 15 A | |
| Standby current | | Approx. 0.5 mA | |
| Frequency ranges | | | |
| Europe | FM | 87.5 – 108 MHz | |
| | MW | 531 – 1602 kHz | |
| | LW | 153 – 297 kHz | |
| | SW | 3900 – 4000 kHz 5850 – 6300 kHz 7095 – 7500 kHz 9325 – 9950 kHz | |
| NAFTA | FM | 87.7 – 107.9 MHz | |
| | AM | 530 – 1710 kHz | |
| | WB | 162.4 – 162.55 MHz | |
| LAM | FM | 87.7 – 107.9 MHz | |
| | AM | 530 – 1710 kHz | |
| APAC | FM | 87.5 – 108 MHz | |
| | AM | 531 – 1701 kHz | |
| Bluetooth | | HFP, PBAP hands-free phone calls, phone book | |
| Bluetooth frequency band | | 2400 MHz – 2480 MHz | |
| Radiated power (EIRP) | | < 10 mW | |
| Inputs | | | |
| CD drive | | CD, CD-R, CD-RW WMA, MP3 | |
| Display | | Dot matrix adjustable (green, red) | |
| Operating temperature | | -10 °C to +55 °C | |
| Storage temperature | | -40 °C to +85 °C | |
| Dimensions (W x H x D) | | 187.3 x 58.3 x 181.1 mm | |
| Weight | | Approx. 1,300 g | |
| Certification | | FCC, CE, RoHS, MVSS 302, UN ECE R10 | |
| Tested acc. to | | UN ECE R118 | |

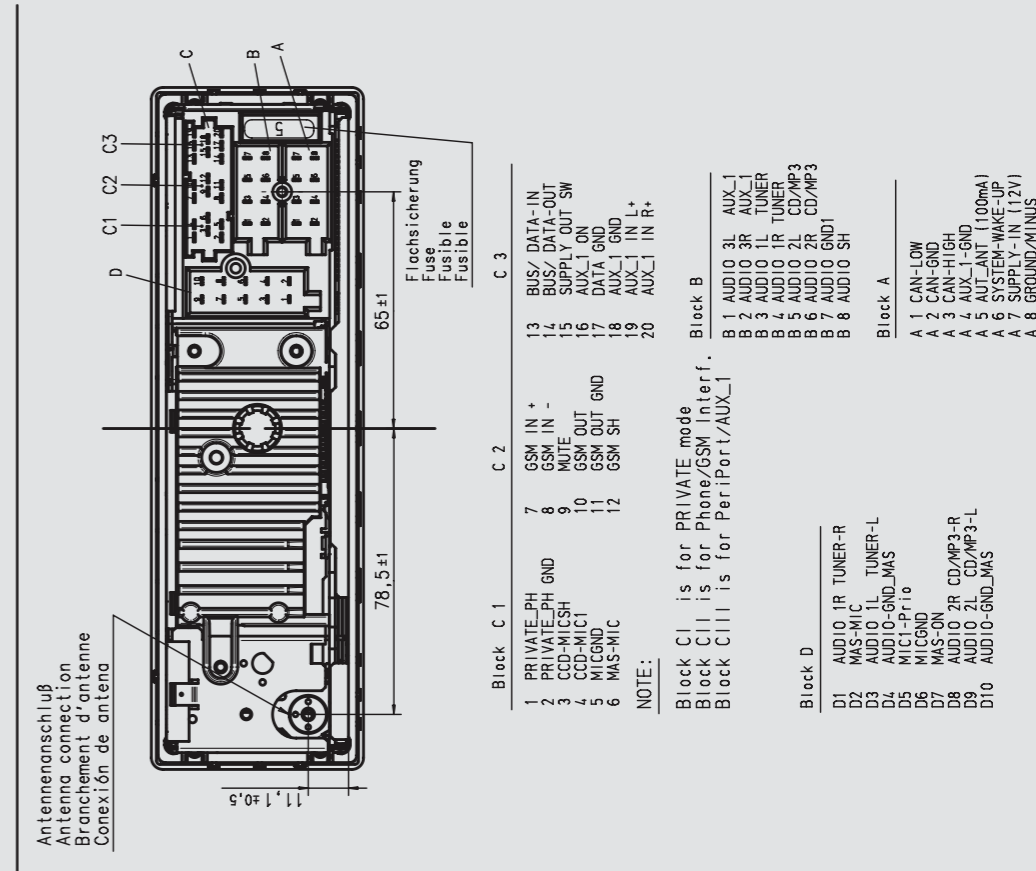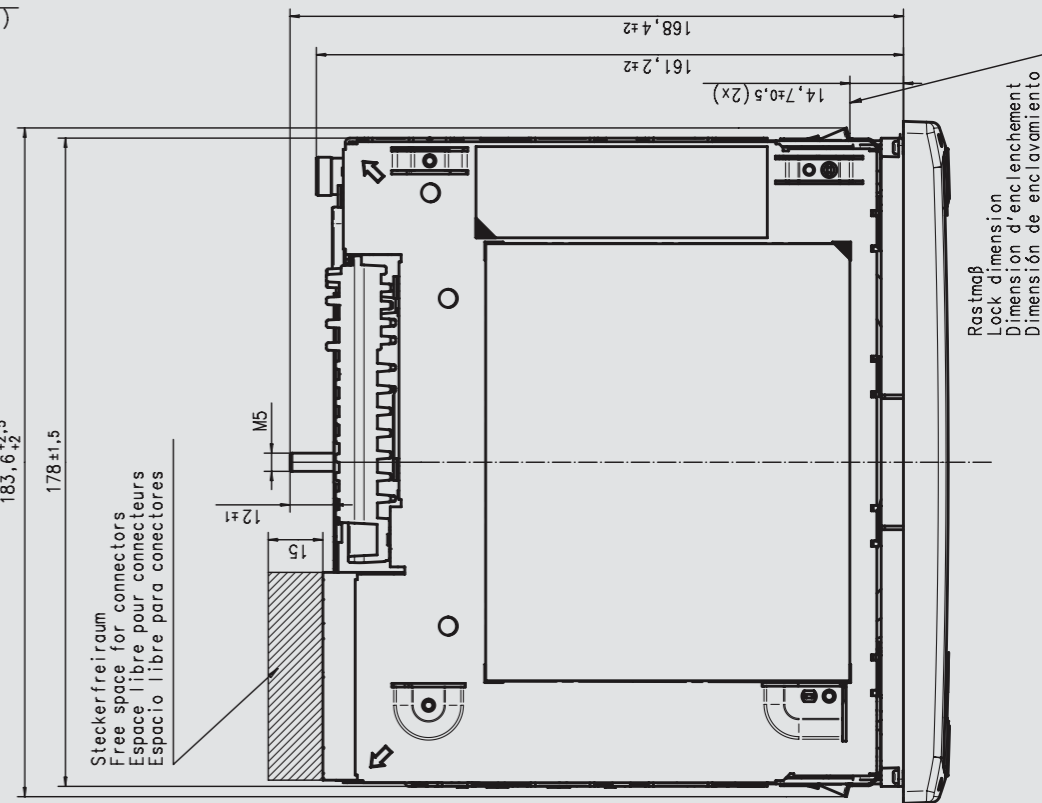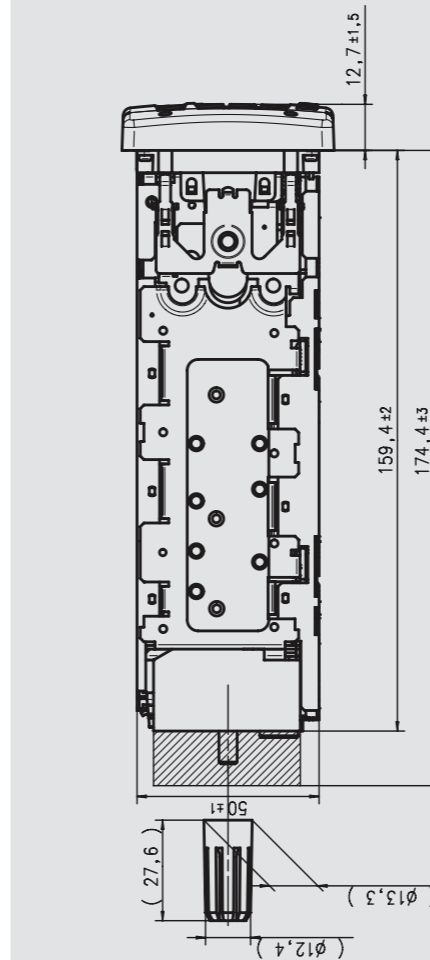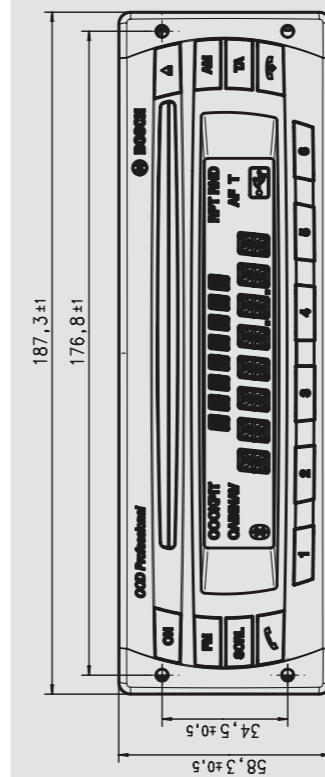

Rastmaß
Lock dimension
Dimension d'encloenchement
Dimensión de enclavamiento